



SAIKANG/Medical




Product data sheet

X9x FEATURES AND HIGHLIGHTS

Technical parameters

External size (LxW):	(2040-2240)x1020 mm
Mattress platform:	(1820-2020)x820 mm
 Safe working load: 	250 kg
 Height adjustment: 	500-950 mm
 Back-rest adjustment: 	0-75° (±10°)
 Knee-rest adjustment: 	0-20° (±10°)
Reverse Trendelenburg:	0-18°
Trendelenburg:	0-18°
Angle indicator:	0-90°
 Voltage and frequency: 	100-240 V · 50/60 Hz
 Plug as required (hospital grade) 	

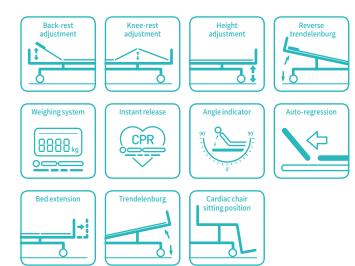





☑ Linear LINAK Motor	6 pcs
✓ 6" Double Side Castors, Central Locking	4 pcs
ABS Side Rail with Integrated Control Panel	1 set
ABS Bed Ends One Step Removable	1 set
Ø75mm Wall Bumper Wheel	4 pcs
☑ IV Pole	1 set
✓ IV Pole Prevision	4 pcs
☑ Drainage Hook	4 pcs
☑ 5th Directional Wheel Pedal	2 pcs
☑ Central Locking Pedal	2 pcs
☑ X-ray Translucent Mattress Platform	1 set
☑ Back-up Battery	1 set
☑ Night Light	1 set
☑ Bed Push Handle for Emergency Transfer	1 set
Manual CPR	
☑ Electric CPR	



Optional

UWeighing System With LCD Screen	
Data Storage System	

🗌 Monkey Pole

Design

Extra Long and height head foot board, with curve surrounded design, provide conforting feeling for patients.

Welding | Safety

Panasonic Robotic ensure, 360° full smooth wedlding. IEC606011 Safty Standard.



Electric motor

Linear motor, with UL/ROHS/EN standard. Noise under 50 dB, with lifetime 20,000 times movement.

Brake

Break spring keep qualified after 10,000times uninteruped break.



Bed surface

X-Ray Translucent Mattress Platform.

1

ABS bed ends

ABS bed ends One Step Removable, meet the first-aid requirements of high-end wards and ICU room.

Battery

Battery - 18times movement with 100kg bearing, 130times movement without bearing.

Bottom

The shelf at the bottom of the bed can hold patients items, like shoes and something others.





Steels | Painting

Baosteel from Fortune Global 500. 11 Process epoxy painting, ASTM testing anti-baterial, paint thickness 0.12mm, brightness 60°, paint can resist 50kg impact.



Plastic

Environmental plastic can be sterilized in 100°C, tensile upto 30MPa.



7 Inch touch screen

Replacing the orginal button screen, more convenient operation. There are two language options, chinese and english. Screen can store the patient and doctor's information, users manuals, weight record

Wheels

TPR tire no worn out after running 30 km, save anti-winding hard shell, united forming without bolts. Pass dynamic test: Bearing 120 kg, run 30 km and pass obstacles 500 time.



Side rail

Tuck away side rail with buffer Built-in controller and angle indicator.



Bumper wheels Bumper wheel , ϕ 74mm, max. protect the bed and patient during transportation.



IV pole Stainless Steel Column with plastic hook.

Lifting pole Lifting pole - Bearing 765N force.











Design



|



Manufacturing



Maintenance



Service



USA

Saikang Medical Technology, Inc. 17800 Castleton St Ste 180, City of Industry, 91748, California. Tel.: +1 949648 2776

United Kingdom

UK Healthward International Ltd. Dept. 111, 196 High Road Wood Green, N22 8HH, London. Tel.: +44 2032399738

Russia

Saikang Medical Russia LLC Truda 174, 454080 Chelyabinsk. Tel.: +7 (351) 214 5566 / 8811 / 1516

East Africa

Saikang Medical Solutions Ltd. Viraj Complex Unit 3, Mombasa Road, P.O. Box 14262-00800, Nairobi. Kenya. Tel.: +254733 704 690

Middle East

Saikang Medical Supplies LLC X22-S03 England Cluster, International City, Dubai. United Arab Emirates. Tel.: +20 128 8962497

SAIKANG Medical

Jiangsu Saikang Medical Equipment Co., Ltd. STOCK CODE: 870098

No. 35, Lehong Road · Zhangjiagang (Jiangsu) · China +86 18021231901 · S 24/7

- ⋈ sales@chinasaikang.com
- () www.saikangmedical.com







Company video